

Express Mail No. EL651891435

FORM PTO-1390
(REV 10-95)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE ATTORNEY DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

15675P369

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

INTERNATIONAL APPLICATION NO.
PCT/FR00/00413INTERNATIONAL FILING DATE
February 18, 2000PRIORITY DATE CLAIMED
09/913971
February 19, 1999

TITLE OF INVENTION

CONTROLLED RUPTURE DEVICE FOR A STRUCTURE OPERATING IN TRACTION AND

APPLICANT(S) FOR DO/EO/US

Guy Valembois; Pascal Gendre; Regis Riffet

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b)) and PCT articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A subsequent specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:

priority request; copy of preliminary examination report w/amended pages; copy of request of filing; copy of forms pct/ib/301 & 304, English translation of amended pages, English translation of prelim. exam report; formal drawings transmittal; 5 drawings sheets; copy of complete application with amended pages (31 pages)

ATTORNEY'S DOCKET NUMBER
15675P369

Form PTO-1390 (REV 10-95) page 2 of 2

09/913971

JCO5 Rec'd PCT/PTO 17 AUG 2001

Atty. Docket No.: 15675.P369
Express Mail #: EL651891435US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the application of:

Guy Valembois, Pascal Gendre and Regis Riffet

For: CONTROLLED RUPTURE DEVICE FOR A
STRUCTURE OPERATING IN TRACTION AND
EQUIPMENT USING SAME

PRELIMINARY AMENDMENT

Hon. Commissioner of
Patents and Trademarks
Washington, D.C. 20231

Dear Sir:

Prior to the examination of the above-identified application, Applicant requests entry of the following amendment:

IN THE SPECIFICATION

Please replace the specification beginning on page 2, line 10 and ending on page 3, line 19 with the attached replacement pages:

REMARKS

Entry of the foregoing amendments is requested.

Respectfully submitted,

BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN

Dated: 8/1/01 By:

Eric S. Hyman Reg. No. 30,139

12400 Wilshire Boulevard
Seventh Floor
Los Angeles, California 90025
(310) 207-3800

ESH:kla

10 However, hitherto, the devices of this type have still
not been satisfactory either. They also lead to not
insignificant shocks and to risks of pollution
following the escape of the gases originating from the
pyrotechnic generator.

15 Solutions based on expanding pyrotechnic tubes filled
with explosive and placed against the structure to be
ruptured, near to a line of weakness formed therein,
have also been proposed.

20 On this point, reference may be made for example to
document FR-A-2 619 738.

This solution is not entirely satisfactory either. This
25 is because it actually leads to a shock level which is
too high for certain applications.

Document DE-19604410 describes a device comprising a
structure placed in tension between two support
30 elements, and a rupture device associated with this
structure in tension so as to rupture the latter on
demand.

In an attempt to improve the situation, present-day
35 studies are tending toward the use of a damper coupled
to the cutting device in order to limit the level of
mechanical stress applied to the equipment that is to
be released.

It is an object of the present invention to propose a new device designed to allow the rupture of a structure forming a tie operating in tension and holding a system, which device is designed to limit the mechanical stress applied to the system at the time of the rupture of the tie, particularly to limit the vibration transmitted to the system.

Another auxiliary object of the present invention is to propose a rupture device of a structure avoiding any pollution of the environment.

These objects are achieved in the context of the present invention by virtue of a device as defined in the appended claim 1.

As a preference, this device for the controlled rupture of fibers, particularly pretensioned fibers, is characterized in that it comprises two stressing members arranged one on each side of the fibers, and operating means designed to, on demand, bring about a relative displacement toward each other of the stressing members, the latter being shaped so that, as they move closer together, they impose on the fibers a radius of curvature that is below the threshold of curvature thereof that leads to rupture in bending.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of:

GUY VALEMBOIS, ET AL.

Application No.:

Filed:

For: **CONTROLLED RUPTURE DEVICE
FOR A STRUCTURE OPERATING IN
TRACTION AND EQUIPMENT USING
SAME**

Art Group:

Examiner:

Assistant Commissioner for Patents
Washington, D.C. 20231

TRANSMITTAL OF FORMAL DRAWINGS

Sir:

Enclosed herewith for filing in the above-identified U.S. Patent Application are the formal drawings, 5 sheets including 16 Figures. Applicant hereby authorizes any additional extension or petition fees under 37 C.F.R. §1.17 or credit for any overpayment to our Deposit Account No. 02-2666. A copy of the Fee Transmittal sheet is enclosed.

Respectfully submitted,

BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN

Dated: 8/17/01


Eric S. Hyman, Reg. No. 30,139

12400 Wilshire Blvd., 7th Floor
Los Angeles, California 90025
Telephone: (310) 207-3800

1 / 5

FIG. 1


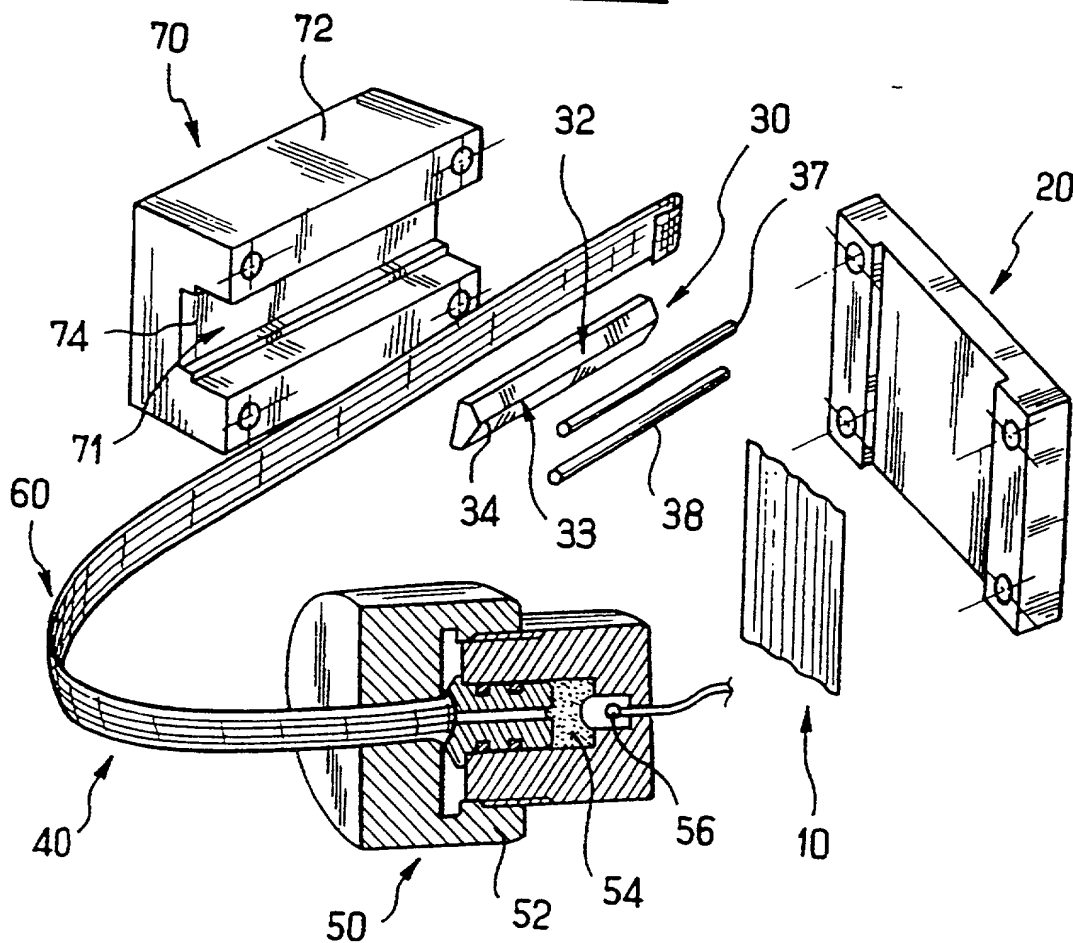


FIG. 2

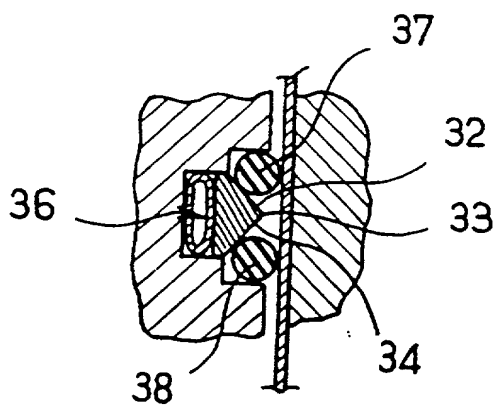

2 / 5

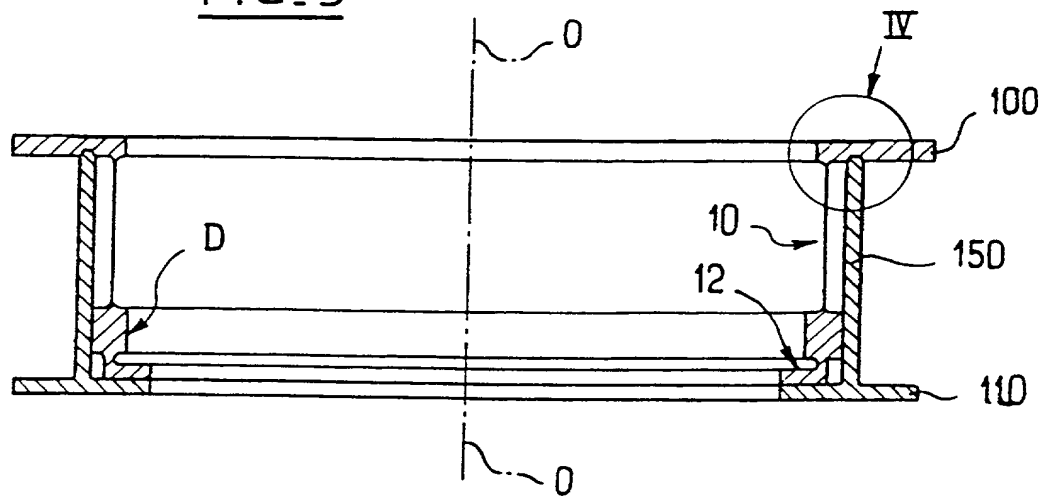
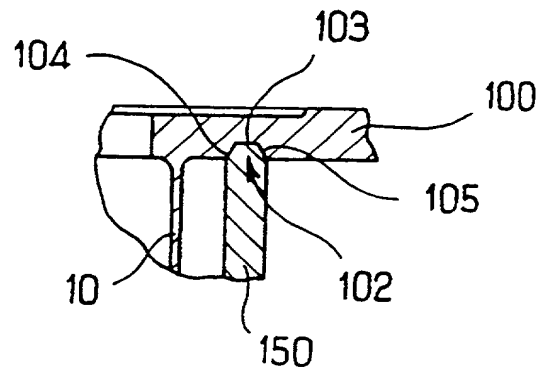
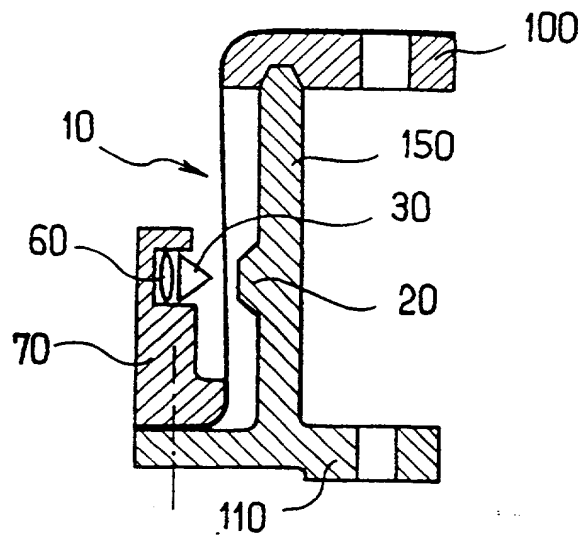
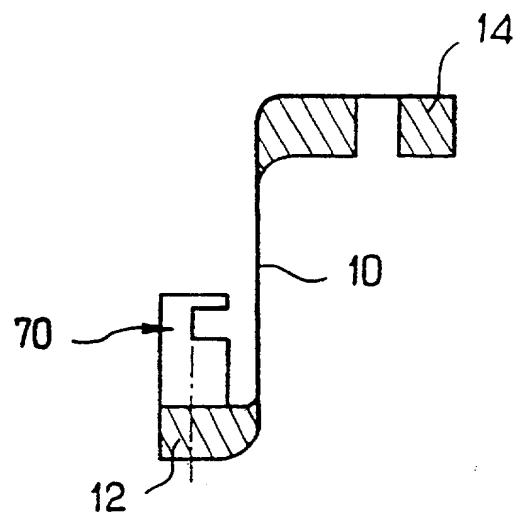
FIG. 3FIG. 4FIG. 5FIG. 6

FIG. 7

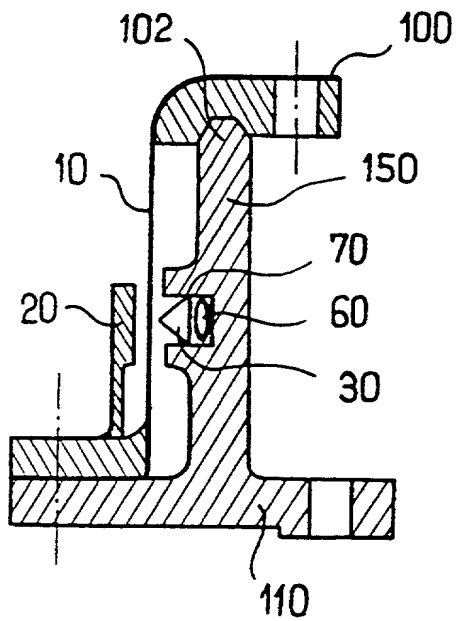


FIG. 8

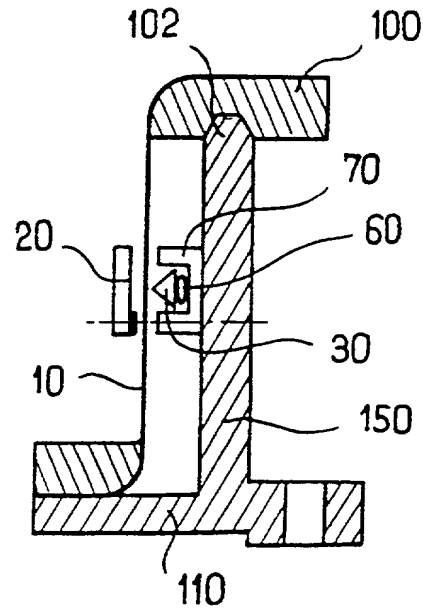


FIG. 9


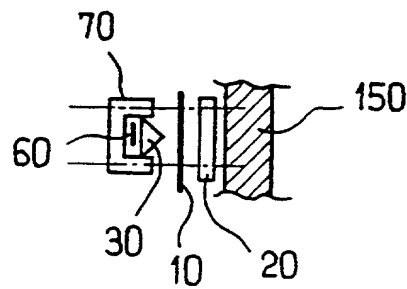


FIG. 10

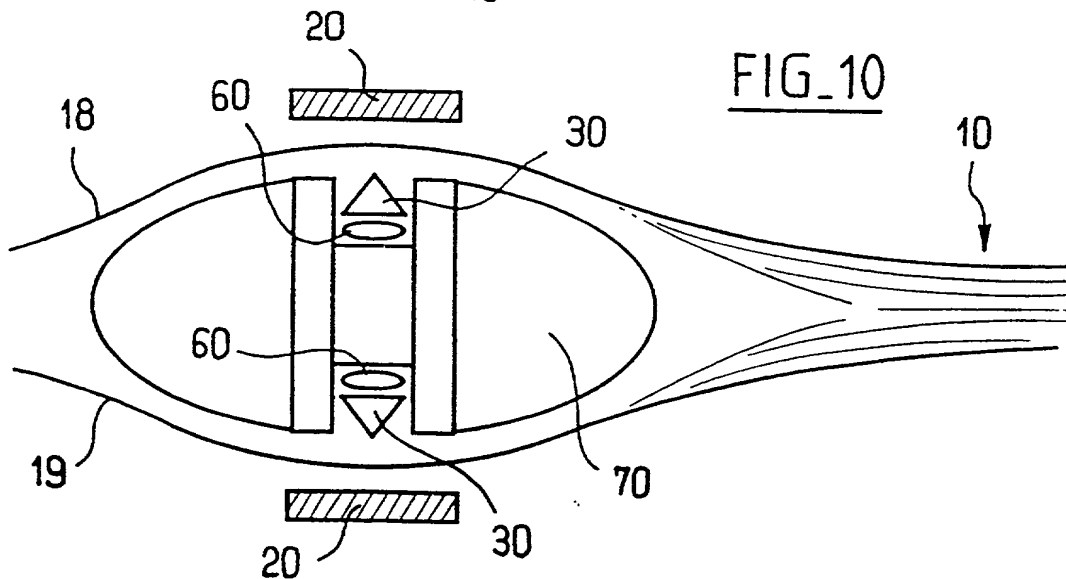

4 / 5

FIG. 11

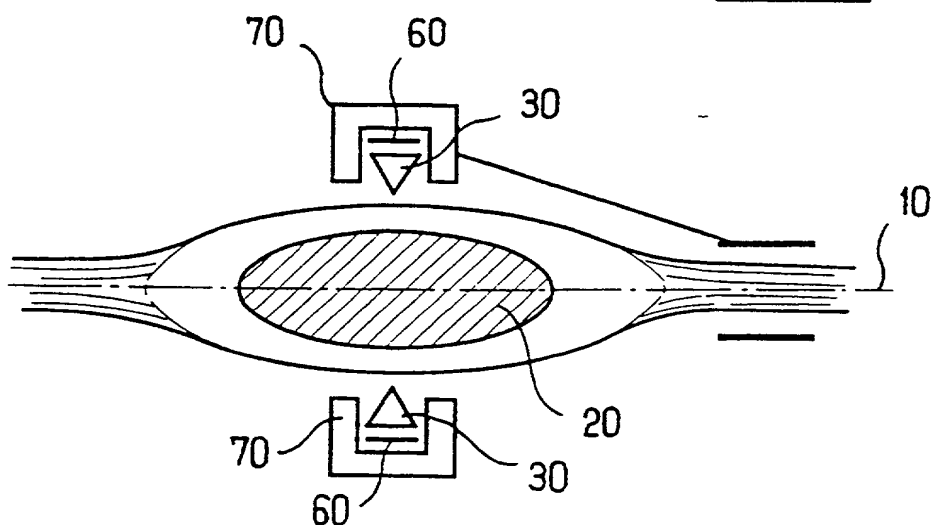


FIG. 12

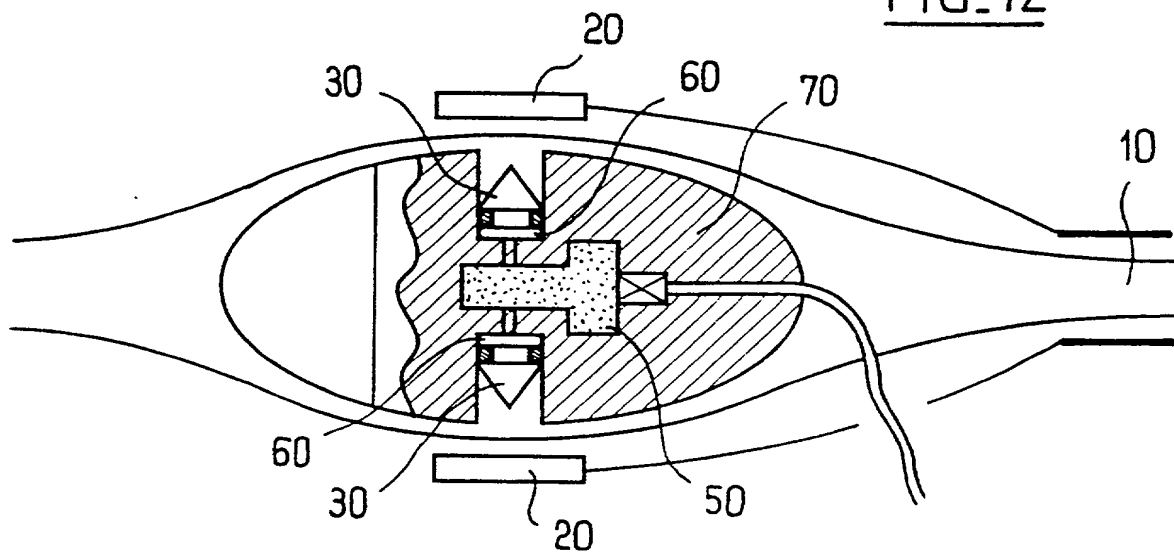


FIG. 13

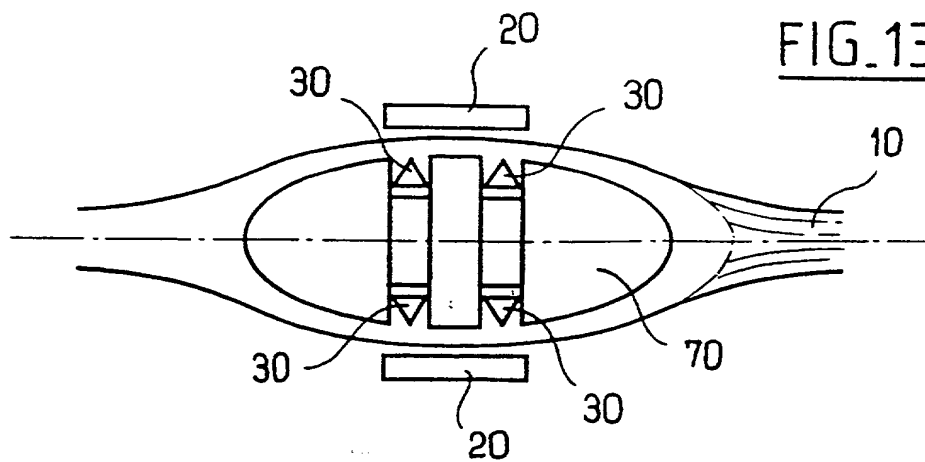


FIG. 14

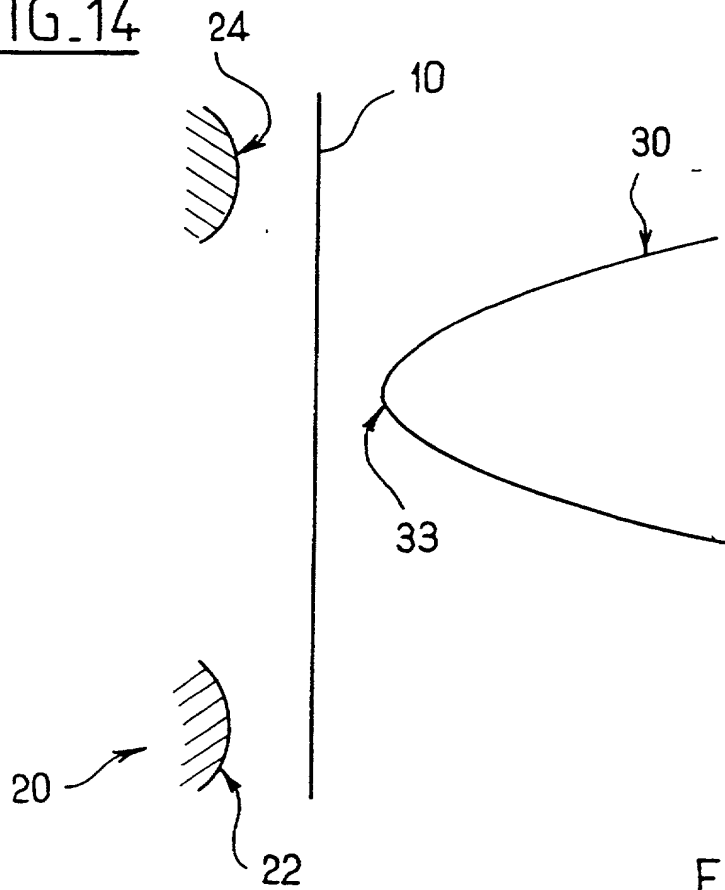


FIG. 15


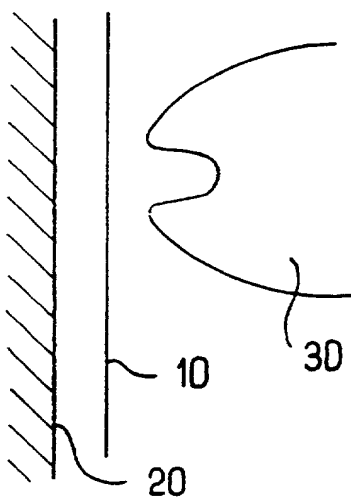


FIG. 16

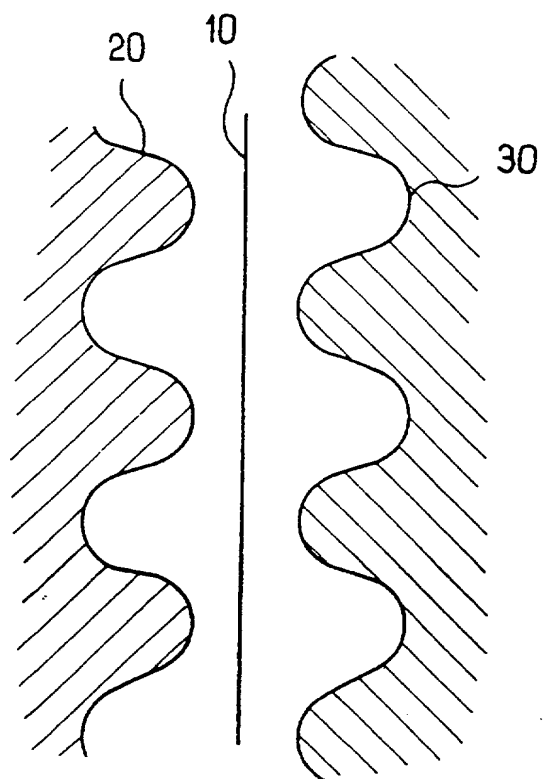

SPORTS

**CONTROLLED-RUPTURE DEVICE FOR A STRUCTURE OPERATING IN
TENSION AND EQUIPMENT USING THE SAME**

5 The present invention relates to the field of
controlled-rupture devices for structures, particularly
structures operating in tension.

10 The present invention may, in particular, find an
application in the controlled rupture of ties or
supports for holding systems, when these need to be
released.

15 More specifically still, the present invention
preferably applies to the field of assemblies
comprising systems which are highly sensitive to
mechanical stress. Thus, the present invention may in
particular find an application in the field of
aerospace, for example as a support designed to perform
the controlled release of small-sized satellites.

20 Numerous devices for cutting ties, cables or the like
have already been proposed.

25 In particular, numerous rupture devices based on
detonating cords have already been proposed.

30 On this point, reference may be made, for example, to
documents FR-A-2 495 991, FR-A-2 492 336,
FR-A-2 364 746, FR-A-2 464 778 and EP-A-55165.

35 These known devices are still not satisfactory,
however. In particular, they generate not insignificant
shocks in the structures cut and their environment.
Furthermore, they lead to pollution which is
unacceptable in certain applications.

Numerous cutting devices comprising a cutter and an
element such as a pyrotechnic generator designed to
move the cutter against the structure to be ruptured in

WO 00/48778

PCT/FR00/00413

CONTROLLED-RUPTURE DEVICE FOR A STRUCTURE OPERATING IN
TENSION AND EQUIPMENT USING THE SAME

5 The present invention relates to the field of
controlled-rupture devices for structures, particularly
structures operating in tension.

10 The present invention may, in particular, find an
application in the controlled rupture of ties or
supports for holding systems, when these need to be
released.

15 More specifically still, the present invention
preferably applies to the field of assemblies
comprising systems which are highly sensitive to
mechanical stress. Thus, the present invention may in
particular find an application in the field of
aerospace, for example as a support designed to perform
the controlled release of small-sized satellites.

20 Numerous devices for cutting ties, cables or the like
have already been proposed.

25 In particular, numerous rupture devices based on
detonating cords have already been proposed.

30 On this point, reference may be made, for example, to
documents FR-A-2 495 991, FR-A-2 492 336,
FR-A-2 364 746, FR-A-2 464 778 and EP-A-55165.

35 These known devices are still not satisfactory,
however. In particular, they generate not insignificant
shocks in the structures cut and their environment.
Furthermore, they lead to pollution which is
unacceptable in certain applications.

Numerous cutting devices comprising a cutter and an
element such as a pyrotechnic generator designed to
move the cutter against the structure to be ruptured in

ARTICLE 34

14-05-2001

- 2 -

09/913971
JC05 Rec'd PCT/PTO 17 AUG 2007
FR 000000413

5

10 However, hitherto, the devices of this type have still not been satisfactory either. They also lead to not insignificant shocks and to risks of pollution following the escape of the gases originating from the pyrotechnic generator.

15

Solutions based on expanding pyrotechnic tubes filled with explosive and placed against the structure to be ruptured, near to a line of weakness formed therein, have also been proposed.

20

On this point, reference may be made for example to document FR-A-2 619 738.

25

This solution is not entirely satisfactory either. This is because it actually leads to a shock level which is too high for certain applications.

30

Document DE-19604410 describes a device comprising a structure placed in tension between two support elements, and a rupture device associated with this structure in tension so as to rupture the latter on demand.

35

In an attempt to improve the situation, present-day studies are tending toward the use of a damper coupled to the cutting device in order to limit the level of mechanical stress applied to the equipment that is to be released.


It is an object of the present invention to propose a new device designed to allow the rupture of a structure forming a tie operating in tension and holding a system, which device is designed to limit the mechanical stress applied to the system at the time of the rupture of the tie, particularly to limit the vibration transmitted to the system.

Another auxiliary object of the present invention is to propose a rupture device of a structure avoiding any pollution of the environment.

These objects are achieved in the context of the present invention by virtue of a device as defined in the appended claim 1.

As a preference, this device for the controlled rupture of fibers, particularly pretensioned fibers, is characterized in that it comprises two stressing members arranged one on each side of the fibers, and operating means designed to, on demand, bring about a relative displacement toward each other of the stressing members, the latter being shaped so that, as they move closer together, they impose on the fibers a radius of curvature that is below the threshold of curvature thereof that leads to rupture in bending.

The applicant company has determined that this device, which works by bending the fibers rather than by penetrating the material and

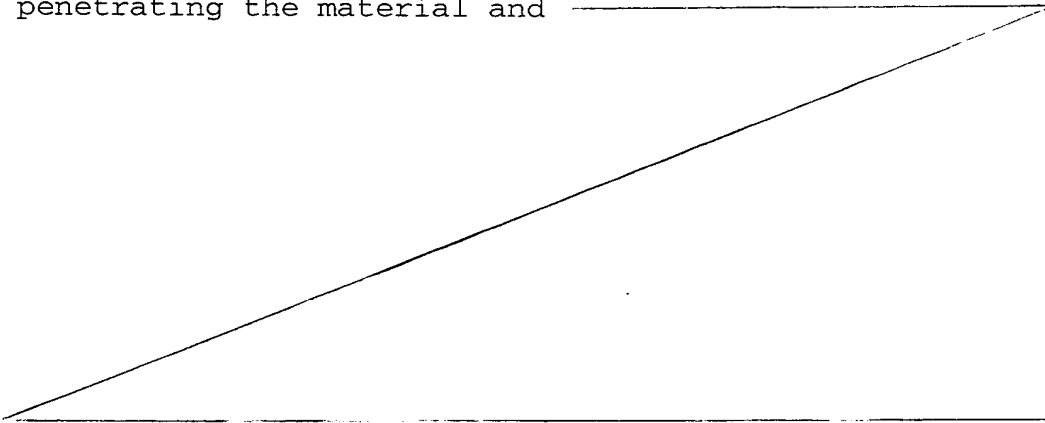

stationary, while the other can move under the actuation of the operating means.

According to an advantageous feature of the present invention, the operating means comprise a pyrotechnic charge capable of generating a high-pressure gas and an inflatable sealed member connected to the pyrotechnic charge and in contact with at least one of the stressing members so as to bring about a displacement of this when said charge is initiated.

According to another advantageous feature of the present invention, the structure to be ruptured, formed on the basis of fibers, may at least in part be agglomerated with a synthetic material so as to form a composite material. As a preference, the structure to be ruptured consists of a strap or the like.

The present invention also relates to an equipment item employing such a rupture device. As indicated above, such an equipment item may, for example, be configured to act as a temporary support for microsatellites on board a rocket, so as to release these at a determined and controlled point on the rocket trajectory.

According to the present invention, an equipment item such as this comprises a structure placed in tension between two support elements, a rupture device free of mechanical shock associated with this structure in tension so as to rupture the latter on demand, and a beam working in compression, inserted between these two support elements in parallel with the structure to be ruptured. In such an equipment item, the beam makes it possible to maintain the relative position of the support elements, in combination with the structure in tension. Further, all that is required is for this structure in tension to be ruptured in order to eliminate the link there is between the two support elements and thus release at least one of these

together with the systems, such as satellites, linked to it.

5 An equipment item such as this may in particular find an application in the support of (a) microsatellite(s) on a launcher. However, it is not restricted to this particular application.

10 Other features, objects and advantages of the present invention will become apparent upon reading the detailed description which will follow and from studying the appended drawings, given by way of non-limiting examples, and in which:

15 - Figure 1 depicts a diagrammatic view in exploded perspective of the basic means that make up a rupture device according to the present invention,

20 - Figure 2 depicts a view in cross section of the same means,

- Figure 3 depicts a view in section of controlled-rupture support equipment comprising a means that can withstand compression,

25 - Figure 4 depicts a detail view of such an equipment item, for the region referenced IV in figure 3, and

30 - Figures 5 to 16 illustrate alternative forms of embodiment of the rupture device according to the present invention.

35 The appended figures 1 and 2 show the basic structure of a device according to the present invention, designed for the controlled rupture of a structure formed of a tape 10.

This tape 10 may itself be embodied in numerous ways.

In the context of the present invention, the structure 10 to be ruptured is preferably formed on the basis of fibers, such as carbon fibers, glass fibers, aramid fibers for example, or alternatively any other type of fiber, used in particular in the textile field and capable of withstanding high tensile forces compatible with the intended applications.

If appropriate, these fibers may be agglomerated in a synthetic material, for example rigidly polymerized, to form a structure to be ruptured 10 made of composite material.

Furthermore, as appropriate, in the context of the present invention, the structure to be ruptured 10 may be nonhomogeneous over its entire length. In particular, it is possible to envisage a structure 10 to be ruptured formed of composite material, that is to say based on fibers embedded in a synthetic material, except in its rupture zone placed facing the stressing means where it consists exclusively of fibers or essentially of fibers and of a small amount of synthetic material.

In the context of the present invention, the fibers are oriented essentially longitudinally, that is to say parallel to the direction of the tension exerted on the structure to be ruptured. This may be a unidirectional fiber structure. However, in an alternative form, fibers oriented transversely may be envisaged.

The structures to be ruptured may be formed of a woven or of a nonwoven.

As a preference, in the context of the present invention, the structures 10 to be ruptured have a longitudinal elastic modulus in excess of 20 000 MPa.

Furthermore, according to a nonlimiting feature of the invention, the fibers used preferably have an individual diameter of between 0.1 and 25 μm , or even between 0.1 and 10 μm .

5

According to the preferred embodiment of the invention, the aforementioned stressing members are formed of retaining means 20, such as an anvil, and of a punch 30.

10

Further, these stressing means are associated with means 40 designed to bring about a relative displacement, on demand, between the retaining means 20 and the punch 30. The means 40 are preferably of pyrotechnic type.

15

As mentioned earlier, the stressing members such as the punch 30 and the retaining means 20 are arranged one on each side of the fibers 10.

20

As also mentioned earlier, the stressing members, such as the punch 30 and the retaining means 20, are shaped so that, as they move closer together, they impose on the fibers 10 a radius of curvature that is below the threshold of curvature thereof that leads to rupture in bending.

25

The punch 30 is preferably formed of a hard material, for example high-carbon steel such as 100C6, with a modulus σ_e higher than 2 000 MPa. The punch may be configured in many ways.

30

As a preference, it essentially comprises, on one side, a dihedron formed of two flat faces 32, 34 which meet at a somewhat rounded edge 33 directed toward the structure 10 to be ruptured and, on the other side, a flat face 36 perpendicular to the plane of symmetry of the dihedron and designed to be stressed by the means 40. The edge 33 extends at right angles to the

35

longitudinal direction of the fibers. The flat face 36 extends parallel to the longitudinal direction thereof.

5 In the context of the present invention, the dihedron formed by the faces 32, 34 preferably defines an angle of between 30 and 90°, very preferably of the order of 60°.

10 The radius of curvature of the rounded edge 33 is preferably smaller than the minimum radius that the fibers 10 can tolerate before they rupture in bending.

15 In the context of the present invention, the means 40 for bringing about the displacement of the punch 30 are advantageously formed by the combination of a high-pressure gas pyrotechnic generator 50 and of an inflatable sealed element 60.

20 The pyrotechnic generator 50 is placed in a rigid casing 52, preferably remote from the punch 30. The rigid casing 52 may itself be formed by assembling several components.

25 The separation between the pyrotechnic generator casing 52 and the punch 30 is intended to mechanically decouple the pyrotechnic generator 50 and the punch 30 so as to avoid the transmission of detrimental mechanical stresses, particularly vibration, between the casing 52 and the punch 30.

30 By way of nonlimiting example, it is possible to envisage a separation of the order of 100 mm, minimum, between the pyrotechnic generator 50 and the punch 30.

35 The structure of the pyrotechnic generator 50 is known per se. The casing 52 defines an internal chamber 54 accommodating a powder charge in conjunction with an initiator 56.

The initiator 56 is preferably of electrical type. However, as appropriate, it is possible to envisage a percussive initiator because of the mechanical decoupling defined between the casing 52 and the punch 30.

It is important that, in the context of the present invention, the powder 54 be designed to generate a gas by combustion and not at all by a deflagration or detonation effect.

The inflatable sealed element 60 is preferably formed of an elongate tube, packaged at rest in the flattened state. Thus, at rest, the flat two main faces of the flattened tube 60 run parallel to the rear attack face 36 of the punch 30 as can be seen in figure 2. One of the flat main faces of the flattened tube 60 incidentally rests on this flat attack face 36. The other face of the tube 60 rests on a stationary bearing face 71.

More specifically still, in the context of the present invention, the inflatable sealed element 40 is preferably formed of a stainless steel tube.

The sealed connection between the tube 60 and the pyrotechnic gas generator 50 may be achieved by any appropriate means, for example by crimping.

The opposite end of the tube may be plugged by any appropriate means.

By way of nonlimiting example, the inflatable sealed tube 60 may have a diameter of the order of 4 mm and a wall thickness of the order of 0.2 to 0.3 mm.

Those skilled in the art will readily understand that, when the generator 50 develops a pressurized gas inside the tube 60, the tube changes from its flattened rest

state to an inflated state of approximately circular cross section.

Thus, the deformation of the inflatable tube 60 bearing
5 against the surface 71 causes the punch 30 to move against the structure to be ruptured 10, so that the latter is sandwiched between the two stressing members such as the punch 30 and the anvil 20.

10 As already stated, in the context of the present invention, the punch 30 is preferably designed to rupture the element to be ruptured 10, not at all by penetrating the material of which this structure to be
15 ruptured 10 is made and therefore by gradually reducing the thickness thereof, but by local deformation of the fibers of which the structure to be ruptured is made, in bending beyond their ability to deform.

To do that, the anvil 20 is preferably formed of a
20 material not as hard as the punch 30, so as to tolerate at least a slight penetration of the structure to be ruptured 10 and possibly of the punch 30, under the effect of the stress thereon, so as to bring about the aforementioned bending.

25 By way of nonlimiting example, the anvil 20 may be formed of a medium-carbon steel. However, many other materials may be envisaged, including, for example, materials based on elastomer or materials exhibiting
30 plastic behavior, such as aluminum, copper, lead, etc.

By way of nonlimiting example, the anvil 20 may be made of a material having an ultimate tensile strength σ_e of below 600 MPa.

35 As appropriate, the anvil 20 may also have, facing the edge 33 of the punch 30, a groove or hollow making it easier to bend the tape, when the latter rests on the margins of said groove or hollow, while the

intermediate segment of the structure to be ruptured 10 enters said groove or hollow under the effect of the punch.

5 If appropriate, the retaining means 20 may incidentally be formed simply of two supports 22, 24 situated on the opposite side of the fibers 10 to the punch 30, as can be seen in figure 14, the two supports 22, 24 being arranged one on each side of the edge 33 of the punch
10 30 in the longitudinal direction of the fibers 10.

According to another advantageous feature of the present invention, the distance separating the two supports 22, 24 is between one times the diameter or
15 thickness of the fibers 10 and the amplitude of relative displacement of the stressing means 20, 30, preferably between two times the diameter or thickness of the fibers 10 and the amplitude of relative displacement of the stressing means 20, 30.

20 Figure 15 illustrates an alternative form of embodiment whereby the stressing members comprise a recessed punch 30, placed facing an anvil 20 which is not as hard, for example based on elastomer.

25 Figure 16 illustrates another alternative form of embodiment whereby the two stressing members are formed of comb-shaped members placed facing each other and offset from one another by half a pitch in the
30 longitudinal direction of the fibers.

When the fibers 10 are stressed in bending by the stressing members 20 and 30, the part of the fibers that lies on the inside of the curvature experiences
35 compressive stress. Conversely, the part of the fibers situated on the outside of the curvature experiences a tensile stress σ_1 due to bending, to which is possibly added a tensile force σ_2 applied to the fibers independently of any bending.

The maximum permissible stress that the fibers 10 can withstand before they rupture can be determined by the relationship:

$$\sigma = [(d/2)E]/r$$

terming:

- . σ represents the maximum local tensile or compressive stress ($\sigma = \sigma_1 + \sigma_2$),
- . E the longitudinal elastic modulus,
- 10 . r the mean radius of curvature, and
- . d the diameter or thickness of the beam consisting of a fiber 10.

- 15 The applicant company has moreover determined that the above formula led to the following radii of curvature r upon rupture for a fiber having a diameter d of 10 μm :

	E (in GPa)	σ (in MPa)	r (in mm)
High-modulus carbon	3 600	2 400	0.75
High-strength carbon	260	3 200	0.4
R-glass	85	3 200	0.13
E-glass	74	2 450	0.15
Kevlar 49	132	3 000	0.22
Kevlar 29	82	3 000	0.13
Steel (35 NCD 16)	220	1 600	0.68

- 20 Thus, the applicant company determined that the maximum radius of the edge 33 of the punch 30 is preferably of the order of 1 mm, preferably at maximum of the order of 0.75 mm.

- 25 As a preference, in the context of the present invention, means designed to initially keep the punch 30 away from the structure 10 to be ruptured as long as the generator 50 is not initiated are also preferably provided.

Such temporary keeping means may be formed of numerous appropriate structures.

5 In the context of the present invention, such temporary keeping means may be formed of two strips of elastic material, for example of silicone elastomer 37, 38, arranged respectively between the structure to be ruptured 10 and one of the flanks 32, 34 of the punch.

10 By way of nonlimiting example, these may be two silicone elastomer strips with a diameter of the order of 2.5 mm.

15 In the context of the present invention, such temporary keeping means may be designed, for example, to keep the edge 33 of the punch 30 a distance of the order of 0.5 mm away from the structure to be ruptured 10.

20 In order to rupture the structure 10, the tube 60 has to receive about 2.5 cm³ of gas at 500 bar.

Thus, the generator 50 is preferably designed to produce at least 1.25 l of gas at one atmosphere.

25 The applicant company obtained very satisfactory results during tests on the severing of an omnidirectional carbon-fiber strap of the order of 25 mm wide and of the order of 0.3 mm thick. These tests, performed with a rupture device of the type illustrated
30 in the aforementioned figures 1 and 2, actually led to a level of shocks on the structure to be ruptured 10 and on its environment of less than 40 g.

35 The device further comprises means 70 designed to keep the inflatable tape 60 in position and to guide the punch 30 between a retracted position away from the structure to be ruptured 10, as illustrated in figure 2, and a working position in which the edge 33 of the punch 30 stresses the structure to be ruptured

10 to bring about local bending thereof and cause it to rupture.

These means 70 supporting the tape 60 and guiding the punch 30 may be embodied in numerous alternative ways.

According to the embodiment illustrated in figures 1 and 2, such support means have thus been represented in the form of a block 72 having a stepped groove.

10

The structure of an equipment item employing such a rupture device will now be described with reference to the appended figures 3 and 4. As indicated earlier, such an equipment item may, for example, be configured to act as a temporary support or interface for micro-satellites on board a rocket or a launcher, so as to release these at a determined and controlled release point.

20 According to the present invention, such an equipment item comprises a structure 10 placed in tension between two support elements 100, 110, a rupture device 20, 30, 40, 50 free of mechanical shock associated with this structure in tension 10 so as to rupture the latter on demand, and a beam 150 working in compression, inserted between these two support elements 100, 110 in parallel with the structure to be ruptured 10. In such an equipment item, the beam 150 makes it possible to maintain the relative position of the support elements 100, 110, in combination with the structure in tension 10. Further, all that is required is for this structure in tension 10 to be ruptured in order to eliminate the link there is between the two support elements 100, 110, and thus to release at least one of these, together with the systems, such as satellites, linked to it.

The structure illustrated in the appended figures 3 and 4 is an annular structure centered about an axis O-O.

This structure comprises two mutually parallel washers 100, 110 taking the place of the aforementioned support elements, the mean plane of which is perpendicular to the axis O-O and which are centered on this axis.

The lower washer 10 can rest, for example, on a base, such as the chassis of a satellite launcher, while the upper washer 100 itself acts as a support bracket for these satellites, or for any other equivalent equipment that is to be released with precision at a controlled moment.

The two washers 100, 110 are joined together by a structure 10 working in tension. Furthermore, an element or beam 150 working in compression is inserted between these washers 100 and 110, in parallel with the structure in tension 10.

The structure to be ruptured 10 is associated with a shock-free rupture device schematically depicted in figure 3 and identified by the general reference D, according to the present invention, comprising stressing members 20, 30 arranged one on each side of the structure 10, for example in the form of a punch 30 associated with a pyrotechnic generator 50 and with an inflatable sealed member 60 as indicated earlier.

As indicated earlier, in this context, all that is required is for the structure 10 to be ruptured by implementing the stressing members 20, 30 in order to disconnect the washers 100, 110 and thus release the elements, such as microsattelites, carried by the washer 100.

In the context of this application, the structure to be ruptured 10 may be formed of a continuous annulus centered about the axis O-O (in which case, a set of punch segments 30 covering almost the entirety of the

interior surface of this structure to be ruptured 10 is provided) or of several elements distributed about the axis O-O (in which case a punch 30 covering the width of each structure to be ruptured 10, facing a
5 respective one of these structures, is provided).

It will be noted that the element 10 to be ruptured working in tension and the element 150 working in compression preferably run parallel to the central axis
10 O-O.

The structure to be ruptured 10 is secured, by one of its axis ends, to one of the washers, for example the washer 100, and is secured at its other end to a flange
15 12 designed to be fixed by any appropriate means, for example by screwing, to the other washer, such as 110.

For its part, the element working in compression is formed of a wall or beam built into at least one of the washers 100, 110, such as the washer 100, so as to be
20 able to be separated therefrom when the structure to be ruptured 10 is ruptured. According to the particular embodiment illustrated in figures 3 and 4, the element working in compression 150 is formed of an aluminum
25 cylinder, the inner and outer faces of which are delimited by mutually parallel generators parallel to the axis O-O. The wall 150 is formed integrally with the lower washer 110 and built into the upper washer 100.

30 The geometry whereby the wall 150 working in compression is built into the upper washer 100 may be embodied in numerous alternative ways.

35 According to the nonlimiting embodiment given in the appended figures, the washer 100 has an annular groove 102 defined by a base surface 103 in the form of a ring perpendicular to the axis O-O and centered on the latter, defining the bottom of a groove, and two flanks

104, 105 diverging from one another in the direction away from the base surface 103, and toward the outer surface of the washer 100. The two flanks 104, 105 are preferably symmetric with respect to a generator
5 parallel to the axis O-O and are inclined with respect to this generator by an angle of between 10 and 60°.

The end of the wall 150 working in compression has a geometry that complements this groove 102.

10

Of course, as an alternative, it is possible to provide a partition 150 working in compression and connected by any appropriate means to the base washer 110.

15 By way of nonlimiting example, the wall 150 working in compression may be made of aluminum, with a thickness of the order of 5 mm and a height (distance separating the two washers 100, 110) of the order of 80 mm, the inside diameter of the washers 100, 110 being of the
20 order of 230 mm.

Figure 5 illustrates an alternative form of embodiment whereby the element 70 forming a guide for the inflatable tube 60 and the punch 30 is fixed to the
25 washer 110, while the anvil 20 consists of the element 150 taking the place of the element resistant to compression. More specifically still, the anvil 20 is formed at an additional thickness of this element 150.

30 Like the embodiment of figures 3 and 4, the element 150 resistant to compression is arranged radially on the outside of the element 10.

One of the ends of the structure 10 to be ruptured is
35 sandwiched between the part 70 acting as a guide and the washer 110. The other end of the structure to be ruptured 10 is fixed by any appropriate means to the second washer 100.

Figure 6 illustrates an alternative form of embodiment whereby the structure 10 to be ruptured is formed of a composite piece, equipped with additional thicknesses at each of its ends to form flanges 12, 14 intended for
5 attachment to the washers 110, 100 or any equivalent means.

More specifically still, according to the embodiment illustrated in figure 6, the composite piece comprises,
10 on the ends of the element to be ruptured 10 which typically is formed of a cylindrical skirt, respective flanges 12, 14 which on the whole are perpendicular to the axis of the cylindrical element 10 and face respectively, in the case of the flange 12, inward and,
15 in the case of the flange 14, outward.

The alternative form thus described with reference to figure 6 is made up of a cylindrical element 10 and of two annular flanges 12, 14. According to another
20 alternative form, it is possible to envisage an element to be ruptured 10 formed of a straight tape equipped, at each of its ends, formed integrally, with additional thicknesses 12, 14 similar to the means illustrated in figure 6.

25 The piece 70 acting as a guide for the inflatable tube 60 and for the punch 30 can be formed integrally on the flange 12 or attached and secured to the latter by any appropriate means.

30 Figure 7 illustrates another alternative form whereby the compression element 150 acts as a guide for the punch 30 and for the inflatable tube 60. In this case, there is an anvil 20 on the opposite side of the
35 element 10 to be ruptured to the punch 30. This anvil 20 is fixed, by any appropriate means, to one of the flanges or washers 100, 110.

More specifically still, according to the embodiment illustrated in figure 7, the element 150 resistant to compression is equipped within its mass with a groove which guides the inflatable tube 60 and the punch 30.

5

By contrast, according to the alternative form illustrated in figure 8, the inflatable tube 60 and the punch 30 are placed in a guide 70 attached to the element 150 resistant to compression. Furthermore, here again, according to figure 8, there is an anvil 20 on the opposite side of the element to be ruptured 10 to the punch 30. It is furthermore possible to envisage for the anvil 20 to itself be secured to the guide 70.

10

Yet another alternative form, illustrated in figure 9, consists in placing the anvil 20, formed of an attached part, on the element 150 resistant to compression, and the guide 70 on the opposite side of the element to be ruptured 10 to the anvil.

15

In the various embodiments described above, with reference to figures 3 et seq., the element to be ruptured 10 runs in an overall direction parallel to the axis O-O of the annular structure. Further, the punch 30 is mounted to move in a direction generally transversal to this axis O-O.

20

Furthermore, it was indicated earlier that the element to be ruptured 10 could be formed either of a continuous annular structure centered about the axis O-O, or of discrete elements distributed about this axis O-O.

25

In this context, the element to be ruptured 10 may be formed, for example, of a tape. This may be unitary, that is to say formed of a single strand, for example of elongate rectilinear cross section, or alternatively circular or oblong, or may be split into various strands.

30

35

According to another alternative form, the element to be ruptured 10 may be formed of a tubular tape or equivalent, that is to say one having a loop-shaped cross section, for example in the form of a closed curve. In this case, it may, for example, be a flattened circular knit.

In the latter cases, it is possible to envisage placing at least one of the anvil elements or punch 30 in the space between the various strands making up the element to be ruptured or even in the interior space of the cross section of a tubular tape.

Figure 10 thus illustrates a support structure in the shape of an ogee 70 placed between two strands 18, 19 of an element 10 to be ruptured, and acting as a guide for the portions of inflatable tube 60 and for the punch segments 30 which are placed facing complementary anvils 20 so that the strands 18, 19 are sandwiched between said anvils 20 and the punch segments 30.

When such an ogee shape 70 is placed inside the cross section of a tape 10 which has a cross section in the form of a closed curve, it is of course necessary for the ogee shape 70 to support a number of portions of inflatable tube 60 and of punch 30 which together cover the entire periphery of the element to be ruptured 10.

According to the embodiment illustrated in figure 10, the various portions of inflatable tube 60 and punch segments 30 are located overall in a common plane orthogonal to the axis of the tape 10. As an alternative, however, particularly when the punch segments 30 have to cover the entire periphery of the ogee shape 70, it is possible to envisage staging these longitudinally along the ogee shape 70 to ensure an overlap between the ends of the various punch segments 30 and thus guarantee complete rupture of the tape 10.

Figure 11 illustrates a reverse arrangement, that is to say an anvil 20 formed of an ogee shape located at the center of the tape to be ruptured and structures 70 providing guidance of the inflatable tube 60 and of associated punch segments 30 arranged facing it, on the outside of the element to be ruptured 10.

In the context of figure 10, it is possible to envisage arranging the pressurized gas pyrotechnic generator on the outside of the ogee shape 70 and of the structure to be ruptured 10. However, as has been illustrated in figure 12, as an alternative, it is possible to envisage incorporating the pyrotechnic generator 50 into the ogee shape 70. In this case, use may be made of a pyrotechnic generator 50 common to the various punch segments 30 or alternatively of a pyrotechnic generator 50 associated with each respective punch 30.

Figure 13 illustrates another alternative form of embodiment whereby there are two punches 30 each associated with a respective pyrotechnic generator (not depicted in figure 13 in order to simplify the illustration) facing each of the zones to be severed of the element 10. Of course, a correspondingly designed facing anvil 20 is provided.

This arrangement illustrated in figure 13 allows a redundant effect and a guarantee of rupture of the structure in the event of deficiency of one of the pyrotechnic generators 50 or alternatively of the associated sealed inflatable tube 60 or even of the displacement of the punch 30.

The use of such a double structure of punch 30 can be applied to all the alternative forms of the present invention which have already been described.

More generally, in the context of the present invention, to guarantee operation of the rupture device, the entire operational sequence from the initiator 56 to the punch 30 can be duplicated in the form of two redundant rupture sequences placed in parallel, or at least certain sensitive elements of such an operational sequence may be duplicated.

Of course, the present invention is not restricted to the particular embodiments which have just been described, but extends to all alternative forms that are in accordance with its spirit.

According to the embodiments previously described, stationary retaining means 20 and a moving punch 30 are envisaged. However, as an alternative, it is possible to envisage the reverse, namely a stationary punch 30 and, facing it, retaining means 20 which can move under the effect of the pyrotechnic operating means 40, or alternatively a punch 30 and retaining means 20 associated with respective displacement means so that, upon actuation, each of the punch 30 and of the retaining means 20 is displaced toward the fibers 10. This arrangement applies in general to all of the stressing means irrespective of their embodiment.

CLAIMS

1. A device comprising a structure (10) placed in tension between two support elements (100, 110) and a rupture device (20, 30, 40, 50) associated with this structure in tension (10) so as to rupture the latter on demand, characterized in that it additionally comprises a beam (150) working in compression, inserted between these two support elements (100, 110) in parallel with the structure to be ruptured (10).
2. The device as claimed in claim 1, in which the structure (10) intended to be ruptured comprises pretensioned fibers, characterized in that it comprises two stressing members (20, 30) arranged one on each side of the fibers (10), and operating means (40) designed to, on demand, bring about a relative displacement toward each other of the stressing members (20, 30), the latter being shaped so that, as they move closer together, they impose on the fibers (10) a radius of curvature that is below the threshold of curvature thereof that leads to rupture in bending.
3. The device as claimed in claim 2, characterized in that the stressing members comprise a punch (30) and retaining means (20) arranged one on each side of the fibers (10).
4. The device as claimed in either of claims 2 and 3, characterized in that the operating means (40) are of pyrotechnic type.
5. The device as claimed in one of claims 2 to 4, characterized in that the operating means (40) comprise a pyrotechnic charge (50) capable of generating a high-pressure gas and an inflatable sealed member (60) connected to the pyrotechnic

charge (50) and in contact with at least one of the stressing members (20, 30) so as to bring about a relative displacement of these when said charge (50) is initiated.

5

6. The device as claimed in one of claims 2 to 5, characterized in that the structure to be ruptured (10) is made at least in part of composite material.

10

7. The device as claimed in one of claims 2 to 6, characterized in that the structure to be ruptured (10) consists of a strap.

15

8. The device as claimed in one of claims 2 to 7, characterized in that the structure to be ruptured (10) is formed on the basis of fibers chosen from the group containing carbon, glass and aramid.

20

9. The device as claimed in one of claims 2 to 8, characterized in that the element to be ruptured (10) is nonhomogeneous over its entire length: it consists essentially of fibers at the rupture zone placed facing the stressing members (30) and consists of a composite material, fibers embedded in a synthetic material, outside this rupture zone.

25

10. The device as claimed in one of claims 2 to 9, characterized in that the fibers that make up the structure to be ruptured (10) have a longitudinal elastic modulus in excess of 20 000 MPa.

30

11. The device as claimed in one of claims 2 to 10, characterized in that the fibers that make up the structure to be ruptured (10) have a diameter of the order of 0.1 to 25 μm , or even of 0.1 to 10 μm .

35

12. The device as claimed in one of claims 2 to 11, characterized in that one of the stressing members comprises a punch (30) made of high-carbon steel.

5 13. The device as claimed in one of claims 2 to 12, characterized in that one of the stressing members comprises a punch (30) which defines a dihedron, the angle of which is between 30 and 90°, preferably of the order of 60°.

10

14. The device as claimed in one of claims 3 and 12 to 13, characterized in that the punch (30) has an edge (33), the maximum radius of curvature r of which is defined by the relationship

15

$$r = [(d/2)E]/\sigma$$

in which

. σ represents the maximum local extensile or compressive stress,

. E represents the longitudinal elastic modulus, and

20

. d represents the diameter or thickness of the beam consisting of a fiber (10).

25

15. The device as claimed in one of claims 3 and 12 to 14, characterized in that the punch (30) has an edge (33), the radius of curvature r of which is at maximum of the order of 1 mm, preferably at maximum of the order of 0.75 mm.

30

16. The device as claimed in one of claims 2 to 15, characterized in that the length and the structure of the inflatable tube (60) are designed to mechanically decouple the pyrotechnic generator (50) and the punch (30) so as to avoid any transmission of vibration from the pyrotechnic generator (50) to the punch (30).

35

17. The device as claimed in one of claims 2 to 16, characterized in that the operating means (40)

comprise a pyrotechnic generator (50) which has an electric initiator (56).

- 5 18. The device as claimed in one of claims 2 to 14, characterized in that the operating means (40) comprises a pyrotechnic generator (50) which has a charge (54) capable of generating a gas by combustion.
- 10 19. The device as claimed in claim 5, characterized in that the inflatable sealed member (60) is formed of a stainless steel tube.
- 15 20. The device as claimed in either of claims 5 and 19, characterized in that the inflatable sealed member (60) has a diameter of the order of 4 mm.
- 20 21. The device as claimed in one of claims 2 to 20, characterized in that the stressing means comprise a punch and retaining means (20) formed of an anvil and located one on each side of the structure to be ruptured (10).
- 25 22. The device as claimed in claim 21, characterized in that the anvil (20) is made of a material not as hard as the punch (30).
- 30 23. The device as claimed in either of claims 21 and 22, characterized in that the anvil (20) is made of medium-carbon steel.
- 35 24. The device as claimed in either of claims 21 and 22, characterized in that the anvil (20) is made based on elastomer or on a material exhibiting plastic behavior, such as aluminum, copper or lead.

25. The device as claimed in either of claims 21 to 23, characterized in that the anvil (20) has a groove or hollow facing the punch (30).

5 26. The device as claimed in one of claims 2 to 25 taken in combination with claim 3, characterized in that the retaining means (20) comprise two supports (22, 24) situated on the opposite side of the fibers (10) to the punch (30), the two
10 supports (22, 24) being arranged one on each side of the edge (33) of the punch (30) in the longitudinal direction of the fibers (10).

15 27. The device as claimed in claim 28, characterized in that the distance separating the two supports (22, 24) is between one times, preferably two times, the diameter or thickness of the fibers (10) and the amplitude of relative displacement of the stressing means (20, 30).

20 28. The device as claimed in one of claims 2 to 27, characterized in that the stressing means (20, 30) are formed of two comb-shaped structures arranged one on each side of the fibers (10).

25 29. The device as claimed in one of claims 2 to 28, characterized in that it further comprises means (37, 38) designed to keep the stressing means, such as a punch (30), away from the structure to
30 be ruptured (10) before the pyrotechnic generator (50) is operated.

35 30. The device as claimed in claim 29, characterized in that the temporary keeping means consist of silicone-elastomer strips (37, 38).

31. The device as claimed in one of claims 2 to 30, characterized in that the pyrotechnic generator

(50) is designed to emit at least 1.5 l of gas at one atmosphere.

5 32. The device as claimed in one of claims 1 to 31, characterized in that the element (150) working in compression is built in at one end into an element of complementary structure (100).

10 33. The device as claimed in one of claims 1 to 32, characterized in that it has an annular structure.

15 34. The device as claimed in claim 33, characterized in that the structure to be ruptured (10) is formed of a continuous annulus.

20 35. The device as claimed in claim 33, characterized in that the structure to be ruptured (10) is formed of several elements distributed about the axis O-O of the structure.

25 36. The device as claimed in one of claims 1 to 35, characterized in that the element (150) working in compression is formed integrally with one of the two support elements (100, 110).

30 37. The device as claimed in one of claims 1 to 36 taken in combination with claim 3, characterized in that the element (150) working in compression also serves as retaining means (20).

35 38. The device as claimed in one of claims 1 to 36 taken in combination with claim 3, characterized in that the element (150) working in compression also serves as a guide for the punch (30) and, as appropriate, for an inflatable tube (60) belonging to the operating means.

39. The device as claimed in one of claims 2 to 38, characterized in that the structure to be ruptured

(10) is formed of a piece of composite material equipped with an additional thickness (12, 14) at least at one of its ends.

- 5 40. The device as claimed in one of claims 2 to 39, characterized in that the structure to be ruptured (10) can be split into several strands.
- 10 41. The device as claimed in one of claims 2 to 40, characterized in that the structure to be ruptured (10) is formed of a tubular structure.
- 15 42. The device as claimed in one of claims 2 to 41, characterized in that it comprises an ogee shape (20, 70) placed between various strands of the structure to be ruptured (10).
- 20 43. The device as claimed in claim 42, characterized in that the ogee shape (70) carries at least one punch (30).
- 25 44. The device as claimed in claim 42, characterized in that the ogee shape (20) serves as retaining means.
- 30 45. The device as claimed in one of claims 42 to 44, characterized in that the ogee shape (70) carries a pyrotechnic generator (50).
- 35 46. The device as claimed in one of claims 42 to 45, characterized in that the ogee shape carries several punches (30).
47. The device as claimed in one of claims 2 to 46, characterized in that it comprises two punches (30) associated with respective pyrotechnic generators (50) facing each zone to be severed of the structure to be ruptured (10).

48. The device as claimed in one of claims 2 to 47, characterized in that it comprises at least two redundant rupture devices (20, 30, 40, 50) placed in parallel.

5

49. The device as claimed in one of claims 2 to 48, characterized in that at least certain elements (20, 30, 40, 50) of the rupture device are duplicated to guarantee the reliability of the assembly.

10

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193

FIG. 1


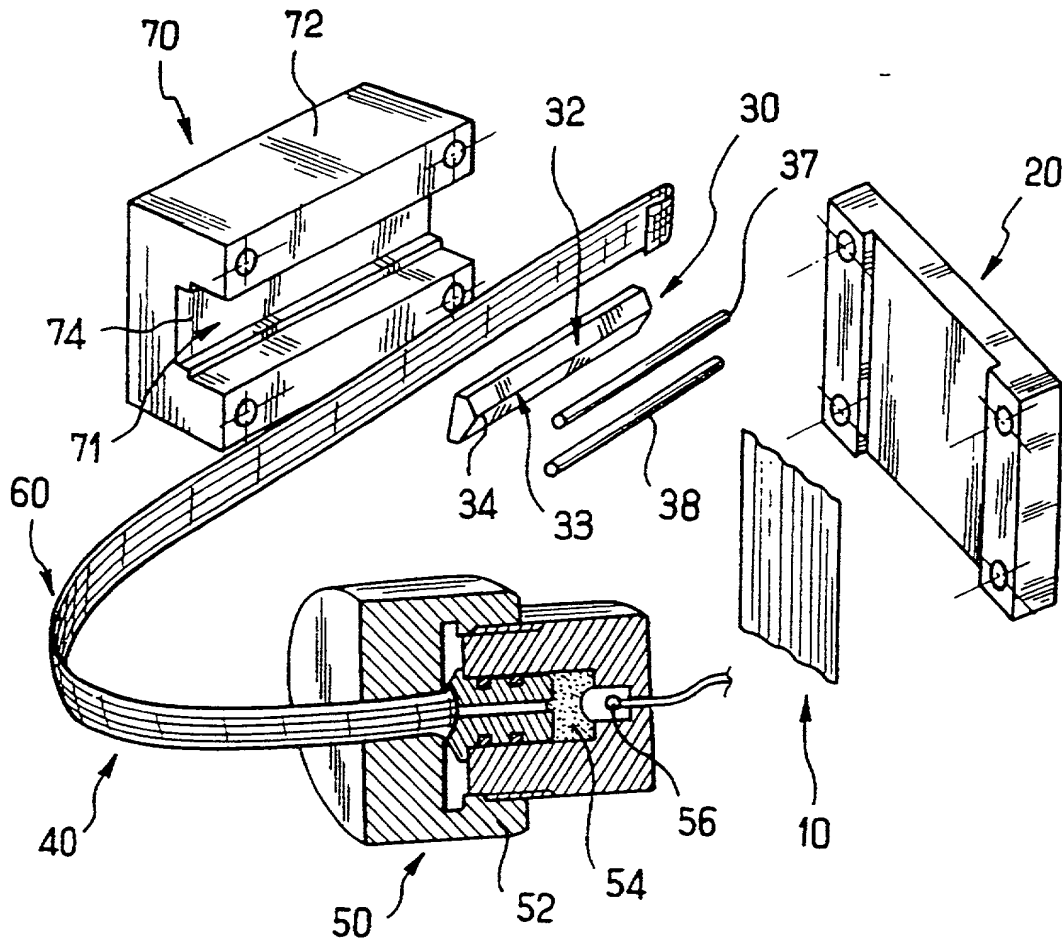


FIG. 2

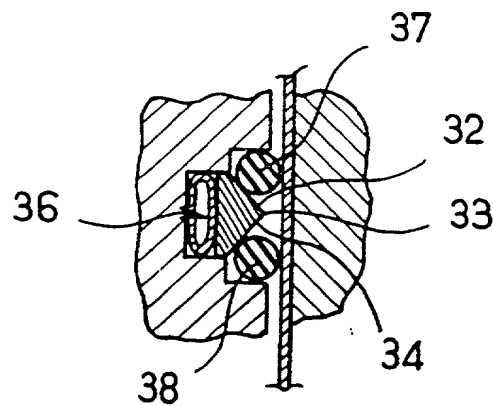

2 / 5

FIG. 3

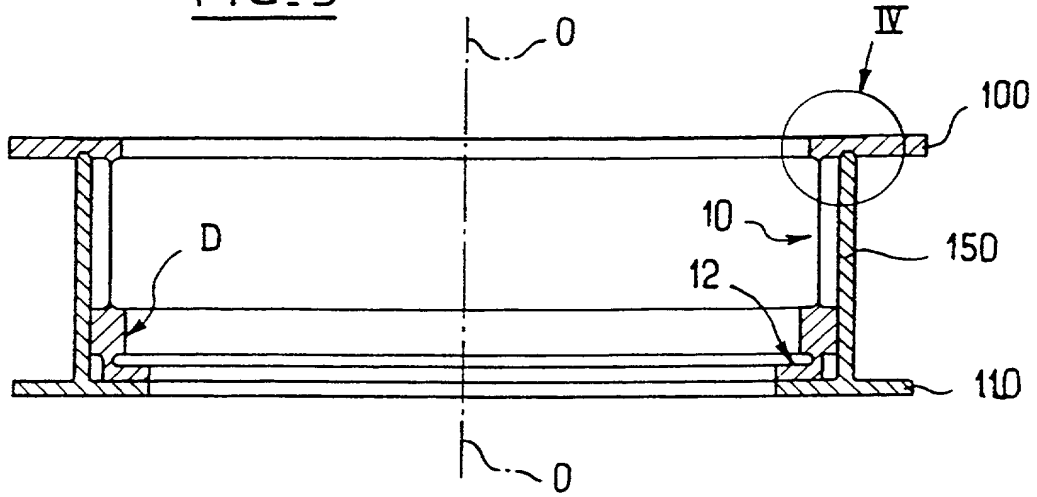


FIG. 4

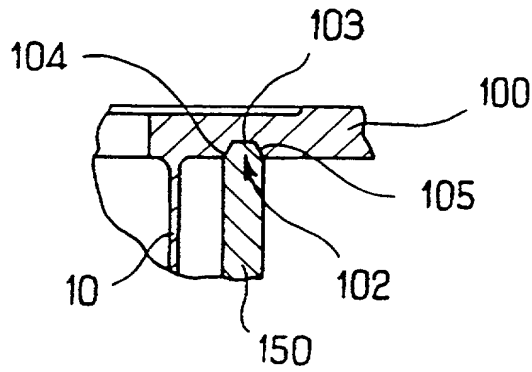


FIG. 5

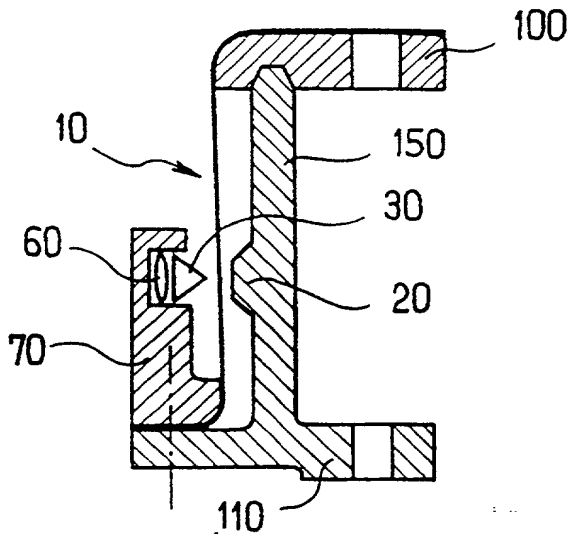


FIG. 6

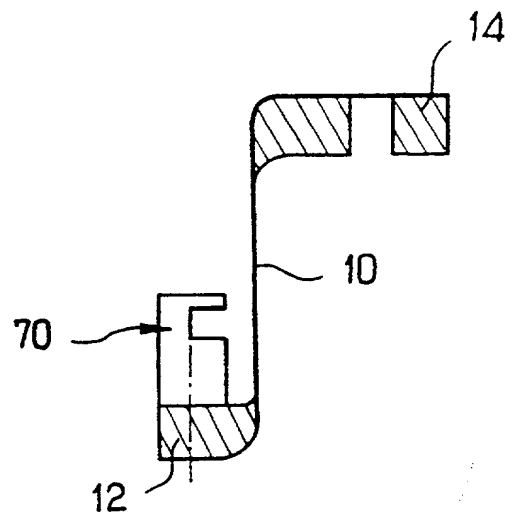


FIG. 7

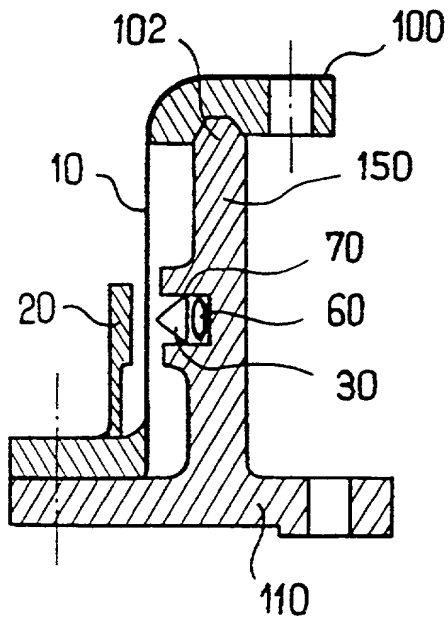


FIG. 8

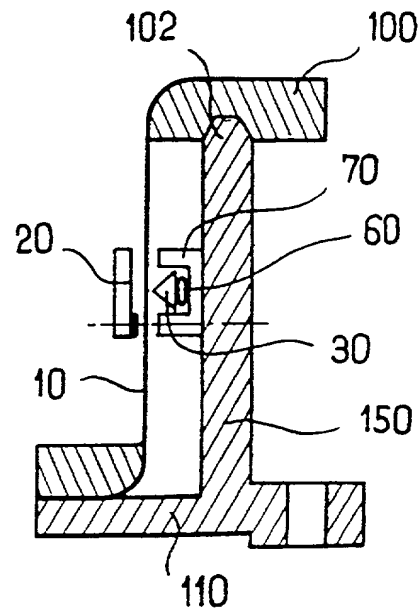


FIG. 9

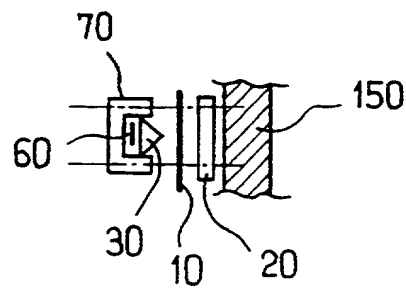


FIG. 10

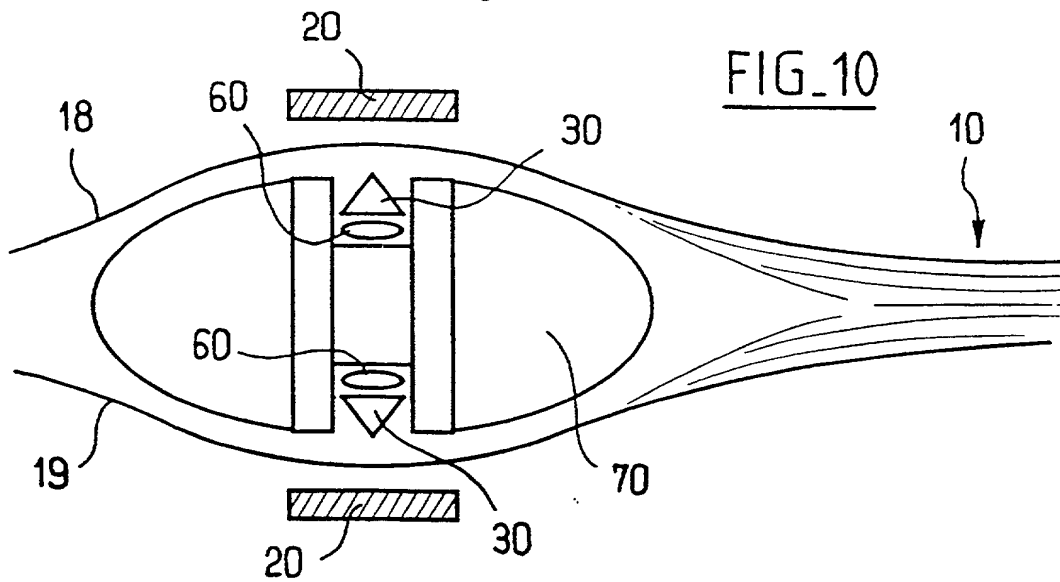


FIG. 11

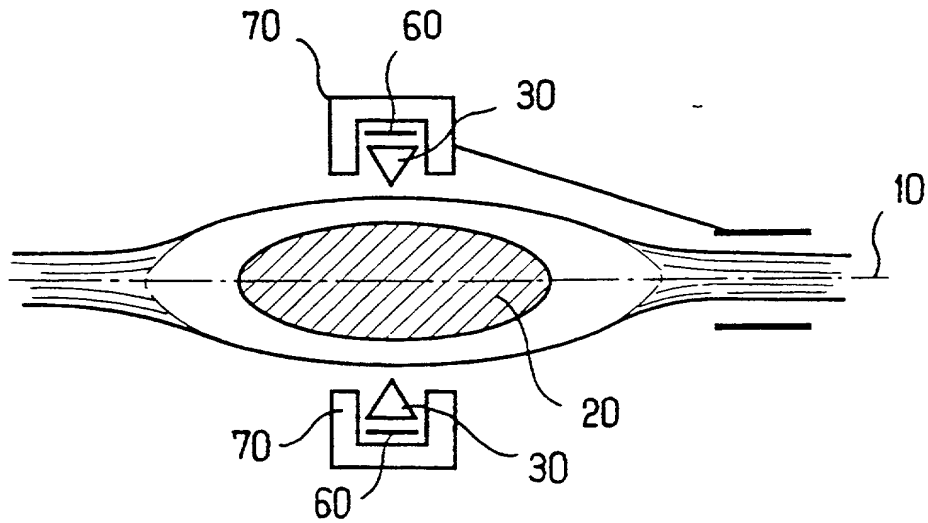


FIG. 12

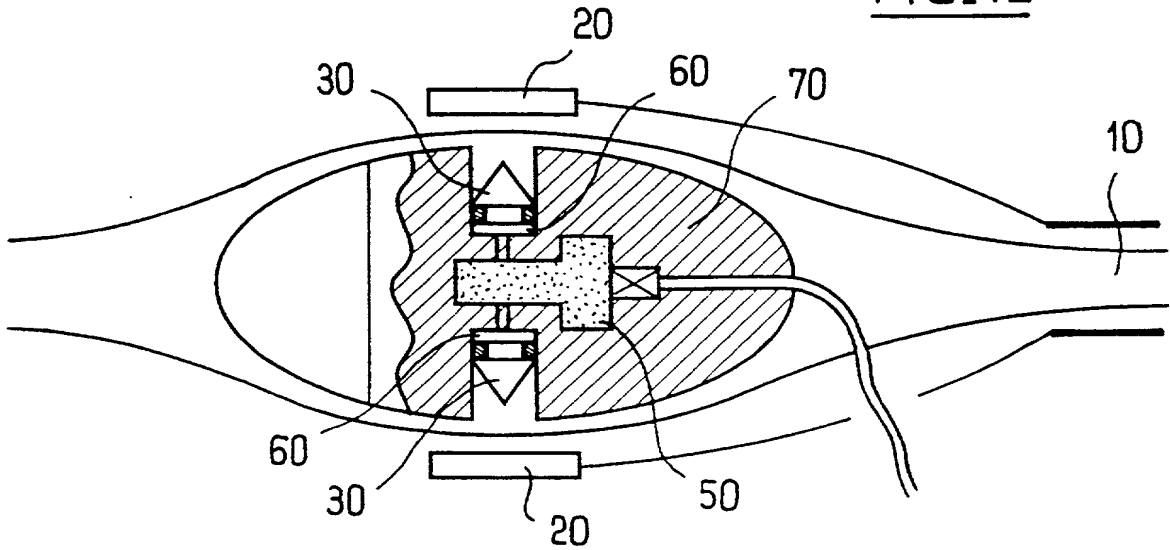


FIG. 13

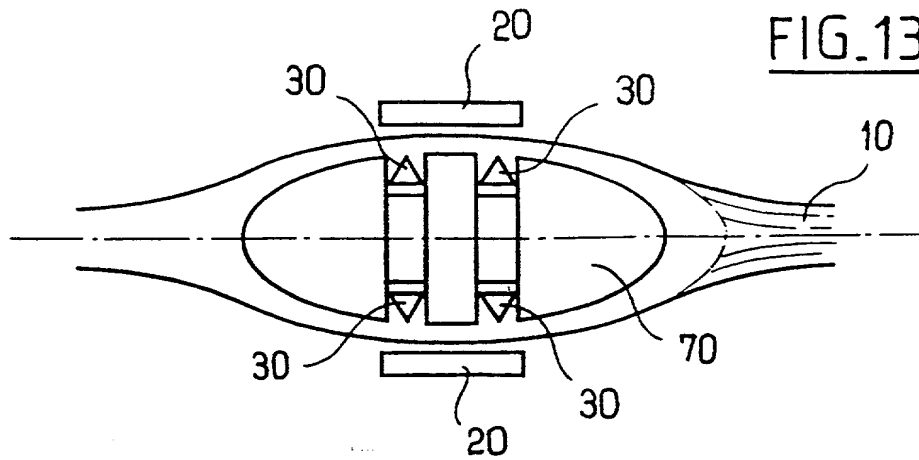


FIG. 14

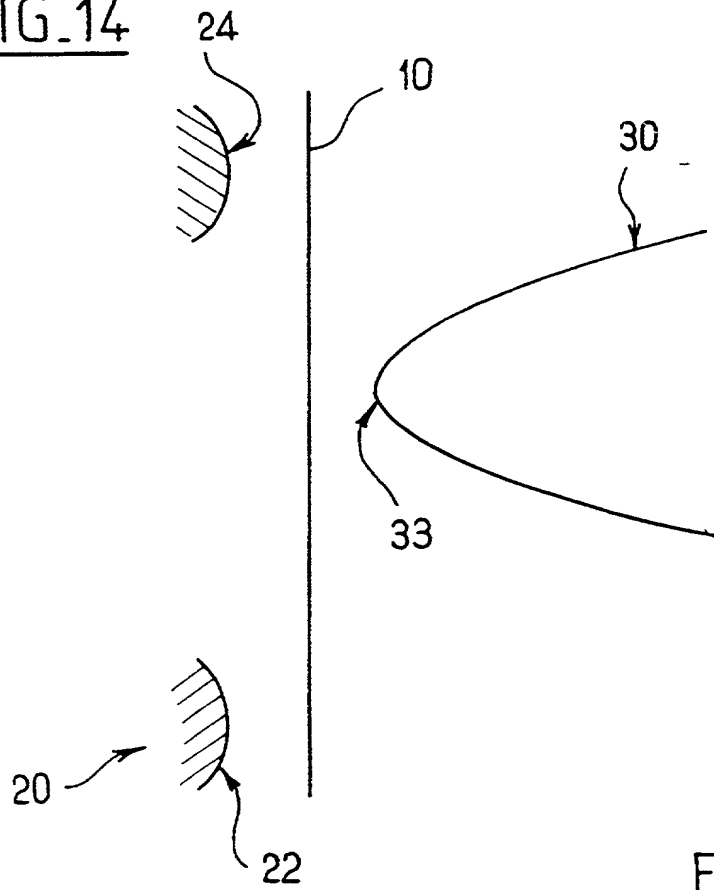


FIG. 15



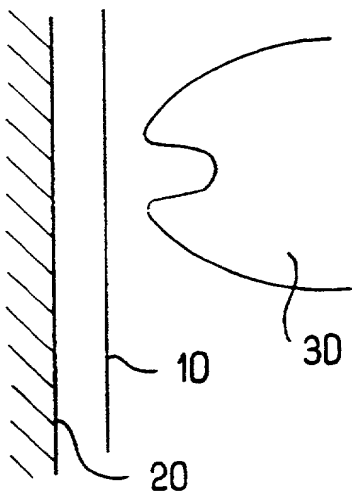


FIG. 16

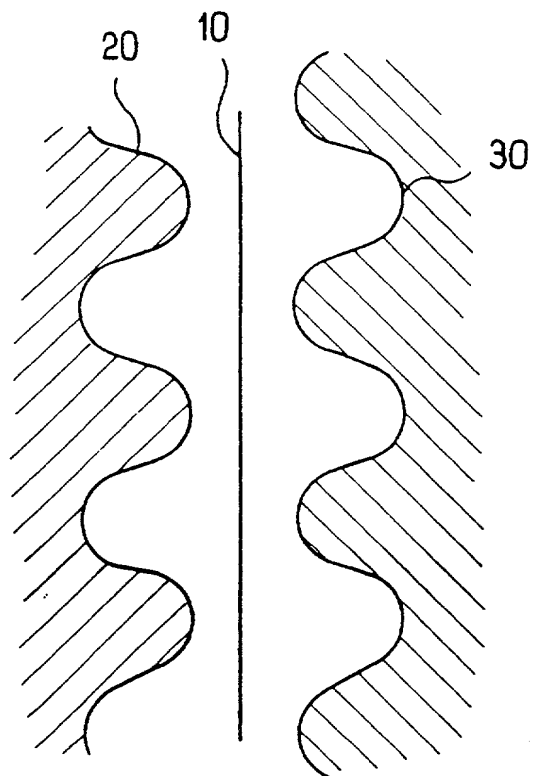



Our ref.: 15675. P369

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled
CONTROLLED RUPTURE DEVICE FOR A STRUCTURE OPERATING IN TRACTION AND EQUIPMENT USING SAME

the specification of which

is attached hereto
was filed on February, 18, 2000 as
Application Serial No. PCT/FR00/00413
And was amended on
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I do not know and do not believe that the same was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 199, of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor(s) certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
FR99/02087	FRANCE	19 February 1999	X	
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

PCT/FR00/00413
(Application Serial No.)

18 February 2000
(Filing Date)

Pending
(Status - patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status - patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status - patented, pending, abandoned)

I hereby appoint BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN, a firm including :

Keith G. Askoff, Reg. No. 33,828; Aloysius T.C. AuYeung, Reg. No. 35,432; Bradley J. Berezna, Reg. No. 33,474; Michael A. Bernadieu, Reg. No. 35,934; Roger W. Blakely, Jr., Reg. No. 25,831; Timothy R. Croll, Reg. No. 36,771; Daniel M. De Vos, Reg. No. 37,813; Scott A. Griffin, Reg. No. 38,167; Stephen D. Gross, Reg. No. 31,020; David R. Halvorson, Reg. No. 33,395; Michael D. Hartogs, Reg. No. 36,547; Brian D. Hickman, Reg. No. 35,894; George W. Hoover II, Reg. No. 32,992; Paul H. Hostmann, Reg. No. 36,167; Eric S. Hyman, Reg. No. 30,139; Dag H. Johansen, Reg. No. 36,172; Stephen L. King, Reg. No. 19,180; Joseph T. Lin, Reg. No. 38,225; Michael J. Mallie, Reg. No. 36,591; James D. McFarland, Reg. No. 32,544; Anthony C. Murabito, Reg. No. 35,295; Kimberley G. Nobles, Reg. No. 38,255; Ronald W. Reagin, Reg. No. 20,340; Kent R. Richardson, Reg. No. P-39,443; James H. Salter, Reg. No. 35,668; William W. Schaal, Reg. No. P-39,018; James C. Sheller, Reg. No. 31,195; Edward W. Scott IV, Reg. No. 36,000; Maria E. Sobrino, Reg. No. 31,639; Stanley W. Sokoloff, Reg. No. 25,128; Allan T. Sponseller, Reg. No. 38,318; John C. Stattler, Reg. No. 36,285; Edwin H. Taylor, Reg. No. 25,129; Lester J. Vincent, Reg. No. 31,460; Ben J. Yorks, Reg. No. 33,609; and Norman Zafman, Reg. No. 26,250; my attorneys; and William D. Davis, Reg. No. 38,428; Gary B. Goates, Reg. No. 35,159; Soyeon P. Laub, Reg. No. P-39,266; Thomas X. Li, Reg. No. 37,079; and Edwin A. Sloane, Reg. No. 34,728; my patent agents, with offices located at 12400 Wilshire Boulevard, 7th Floor, Los Angeles, California 90025, telephone (310) 207-3800, with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor: VALEMBOS Guy

Inventor's Signature:

Date: **10 SEP. 2001**

Residence: Blagnac / FRANCE
(City, State) *FRX*

Citizenship: FR
(Country)

Post Office Address: 20, rue de Sologne - 31700 BLAGNAC / FRANCE

Full Name of Second/Joint Inventor: GENDRE Pascal

Inventor's Signature:

Date: **10 SEP. 2001**

Residence: TOULOUSE / FRANCE
(City, State) *FRX*


Citizenship: FR
(Country)

Post Office Address: 56, rue Raspail - 31400 TOULOUSE / FRANCE

3-00

Full Name of Third/Joint Inventor: RIFEET Régis

Inventor's Signature:


FRX

Date: **10 SEP. 2001**

Residence: Roquettes / FRANCE
(City, State)

Citizenship: FR
(Country)

Post Office Address: 2, rue de la Garonne - 31120 ROQUETTES / FRANCE

DECL US BLA